




# TREMproof FBM Double Sided Tape

## Double-Side Butyl Tape

### DESCRIPTION

TREMproof FBM Double Sided Butyl Tape is a self-adhering waterproofing sealing tape. It primarily consists of butyl rubber as its main ingredient. Possessing a remarkably strong adhesive force to various surfaces, it exhibits exceptional weather resistance, resistance to aging, and impermeability to water. This double-sided tape serves the purposes of sealing, damping, and protecting the adherent surface. It is solvent-free, eliminating any possibility of shrinkage, and showcases outstanding capability in accommodating thermal expansion, contraction, and mechanical deformation of the adherent surface.

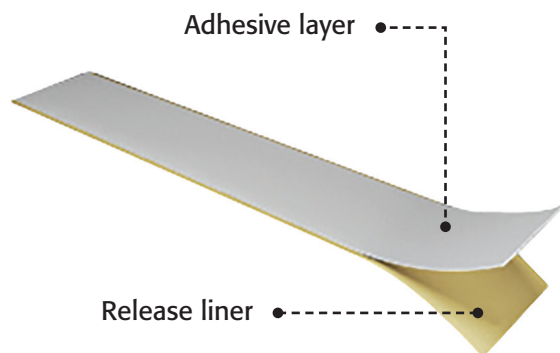

### APPLICATION

The product is suitable for use in overlapping transitions between dissimilar and asphalt coated surface.

### INSTALLATION

1. Clean the base material to ensure the surface of the bonded base material is free of floating ash and water stain or wipe the surface with a rag.
2. Take the adhesive tape with appropriate length, tear off the release liner, use a pressing plate to roll the base material and adhesive tape to remove the air and bond tightly.

### PACKAGING

- Roll Size: 100mm x 40m
- Tape Thickness: 1mm

### WARRANTY

Tremco warrants its Products to be free of defects in materials but makes no warranty as to appearance or colour. Since methods of application and on-site conditions are beyond our control and can affect performance. Tremco makes no other warranty, expressed or implied, including warranties of MERCHANTABILITY and FITNESS FOR A PARTICULAR PURPOSE, with respect to Tremco Membranes. Tremco's sole obligation shall be, at its option, to replace, or refund the purchase of the quantity of Tremco Membranes proved to be defective and Tremco shall not be liable for any loss or damage.

To find your local office address and contact details, visit

[www.tremcocpg-asiapacific.com](http://www.tremcocpg-asiapacific.com)

REV22/07/24